

## Warning!

### IMPORTANT SAFEGUARDS:

Read and follow all safety instructions before installation! Save these instructions and deliver to owner after installation.

### Important:

Risk of shock. Disconnect power before installation. Read all instructions carefully before attempting installation. If you do not understand these instructions, please consult your local distributor. Thoroughly inspect your fixture for any freight damage; freight damage should be reported to the delivery carrier.

This fixture must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.



Figure 1: Fixture assembly



Figure 2: Inside of junction box. (1) – power source threaded through strain relief.

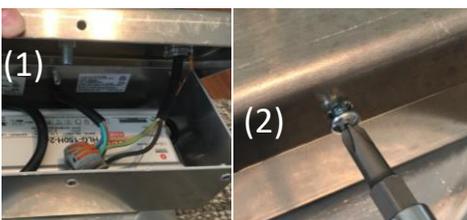


Figure 3: (1) Connected wires in junction box, (2) tightening lid.

### Electrical Connections:

1. Connect brown AC fixture wire to the black supply wire (line).
2. Connect blue AC fixture wire to the white supply wire (neutral).
3. Connect green AC fixture wire to the green supply wire (ground).

### 0-10V Dimming Connections: (If applicable)

1. Connect blue wire to the (+) 010V dimming connection.
2. Connect the white wire to the (-) negative dimming connection

### Tools needed:

1. Philips head screw driver.
2. 3 Electrical connectors.

### Fixture Assembly:

1. Gently remove fixture from packaging.
2. If using your own junction box or plug see **Electrical Connections** section above.
3. If using Dome High Bay integrated junction box as shown in Figure 1 continue to step 4.
4. Remove 6 screws on junction box.
5. Remove driver cord from the strain relief. Thread line voltage cable through strain relief. See Figure 2.
6. Make connections as described in **Electrical Connections** section above.
7. Place spliced wires inside integrated junction box and close by fastening the lid with the supplied 6 screws. See Figure 3.
8. Tighten strain relief on top of junction box to ensure power connections will not break.
9. Hang fixture at desired indoor location using supplied eye hook. Ensure location is structurally sound for this fixture.

### Trouble Shooting Tips:

1. Verify proper line voltage is present and wired to the correct input voltage.
2. Verify fixture wiring.
3. Verify fixture is grounded.